

BEAMFLEX 2835 LED STRIP (CCT Tunable 25°x55°WALL WASHER J022)

(10mm 24VDC 112LED/meter 17W/meter CRI>90)



Features

- 1, Can replace the traditional LED strip to achieve the effect of wall-washing
- 2, Structural patent technology
- 3, Silicone extrusion technology
- 4, RTR (R2R, Roll to Roll) manufacturing process
- 5, 5 years warranty
- 6, Dimmable
- 7, CCT Tunable
- 8, Optic lens:25°x55°



Application


- 1, Residential lighting
- 2, Display cabinet lighting
- 3, Hotel and club lighting
- 4, Shop boutique lighting
- 5, Corridor reception lighting



Normative requirement

- 1, Photobiological safety: IEC 62471
- 2, Ingress Protection: EN 60529
- 3, Safety Requirement: EN 62031 IEC 60598-1
- 4, EMC/radio disturbance characteristics: EN 55015
- 5, RoHS: Yes
- 6, CE: Yes

Dimension





Photoelectric parameters


Part No.	V/ DC	Pow. (W/m)	ССТ	CRI	LM/M	LM/W	SDCM
RTR-CAA24-6963	24	24 17	3000K	90	986	58	≤5
	24		6500K	90	1105	65	≤5

Technical parameters


LED/m	Minimum	Maximum run	Ambient	Operating	Storage	IP
	cut length	length (mm)	temperature	temperature	temperature	rating
	(mm)					
112	125	5000	-20 + 40°C	-20 + 80 °C	-35 + 80°C	66

Light distribution(cd)

Beam angle(2Xθ1/2): 25°x55°

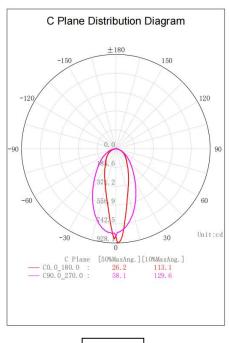


3000K

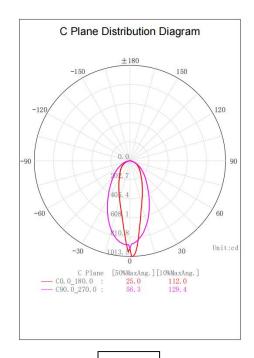

6500K




Lux diagram

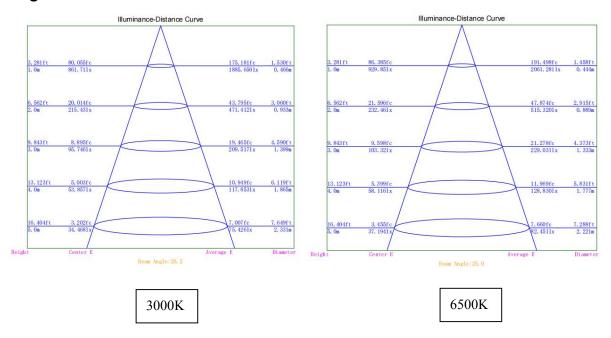

Working length and recommended power supply relationship

	Working	Voltage	Curren	Power	Recommended	Power
Part No.	length	(VDC)	t(A)	consumptio	power supply	supply
	(mm)			n (W)	(W)	mode
RTR-CAA24-69XX	1000 2	24	0.67	16	20	Single
KIK-CAA24-09AA		24	0.07			end
RTR-CAA24-69XX	5000	24	2.87	69	96	Single
KIK-UMAZ4-09AA	3000 24	2.01	09	90	end	

Accessories

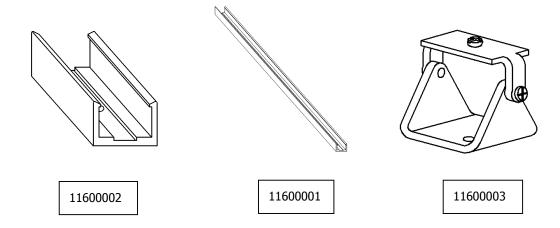





Installation


Installation number	Installation	Installation Steps	Description
		A1	Lock the clip firmly with a self-tapered screw.
A	Flexible LED strips and Clip installation	A2	The flexible LED strip is fixed in the clip, light-emitting area face up.
		А3	Finished
		B1	Lock the aluminium profile firmly with a self-tapered screw.
В	Flexible LED strips and aluminium profile installation	B2	The flexible LED strip is fixed in the aluminium profile, light-emitting area face up.
		ВЗ	Finished
С		C1	Lock the aluminium profile and adjustable angle base with Machine tooth screws
	Flexible LED strips \ aluminium profile and Adjustable Angle Base installation	C2	The flexible LED strip is fixed in the aluminium profile, light-emitting area face up.
		C3	Flexible LED strips fixed.
		C4	Lock the adjustable angle base with self-tapered screws, Adjust the rotation angle of the adjustable angle base as needed. Finished.




A)










B)










C)

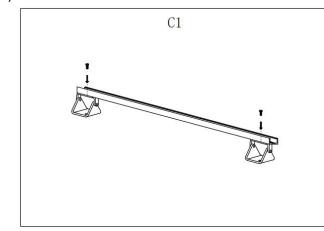

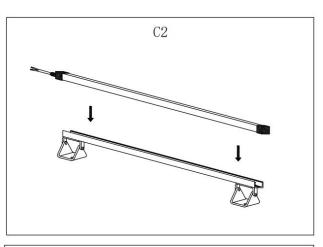


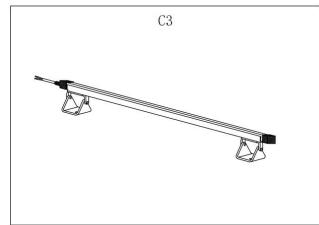


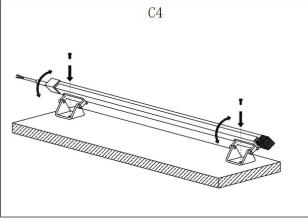



Wiring diagram

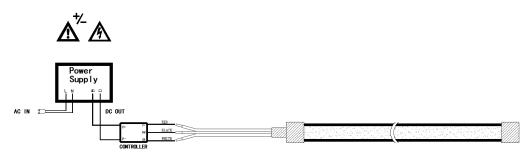

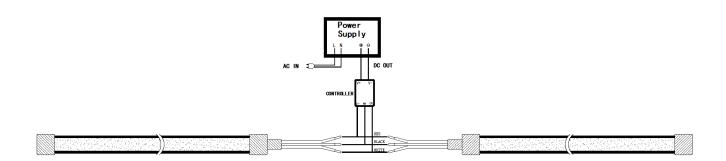

Reliability testing

No:	Name	Test condition	Standards	
1	High and low	gh and low -40°C, 1Hrs; 60°C, 1Hrs; 4 hours per cycle;		
	temperature	continuous testing occurred for 168 hours.	IES LM-79	
	cycle test			
2	High temperature	60°C, continuous testing occurred for 336	IEC60068-2-2	
	lighting test	hours.	IES LM-79	
3	Normal	TH=25℃,continuous lighting	RTR	
	temperature			
	aging test			
4	Ultraviolet(UV)	Irradiance: 0.89W/m², 60±3℃, 8Hrs; dark,	ASTM-G154	
	aging test	high humidity (water spray) for 4 hours,	IES LM-79	
		50±3℃ cycle test ; continuous testing		
		occurred for 500 hours.		
5	Bending test	Wrap the product around a 10cm diameter	RTR	
		round tube,-40℃,20Hrs;60℃,20Hrs		
6	Twisting test	Install the 0.5-meter-long product on the	RTR	
		twist machine with a twisting angle of		
		720° and 2,000 times.		



Package



Single bag	Carton box	Meter / bag	Bags / carton	GW. ±5%
size(mm)	size(mm)			(Kg)
400x380x14	440x400x420	5	25	23.04

Cautions

- 1, The LED module itself and all its components may not be mechanical stressed. Do not modify or disassemble product beyond instructions.
- 2. This product is intended to be installed by qualified, licensed electricians in accordance with electrical code regulations.
- 3, Only install with a suitable DC Constant Voltage power supply with right parameters of current and power.
 - 4, The minimum bending radius is 50 mm.

Modified history

Version	Checked	Mark	Date
V00	Jack	First release	2023.1.11